


OSIGHT XE AMRS

One Optic. Absolute Adaptability

	Enclosed Emitter Optic with RMR Footprint		Industry's First 2/6+32 MOA Advanced Multi-Reticle System (AMRS)
	Industry's First Collapsible Backup Rear Sight (CBRS™)		Side-Loading CR1632 Battery
	Aspherical Lens		Compact Size



Note: RMR is a registered trademark of Trijicon, Inc., and is used solely to indicate compatibility. No affiliation or endorsement is implied.

OSIGHT XE AMRS

One Optic. Absolute Adaptability

Market Applications


Tactical, Self-Defense, Home Defense, Training, Competition

UPC

6978095650292

DESCRIPTION

The Osight XE AMRS is an enclosed-emitter pistol optic built on the Ruggedized Miniature Reflex footprint, delivering rugged protection and broad compatibility across full-size and compact tactical pistols. Its industry-first 2/6+32 MOA advanced multi-reticle system (AMRS) allows seamless switching between five reticle options, adapting from precision aiming to rapid target acquisition. A side-loading CR1632 battery enables quick replacement without removing the optic, while motion-activated wake and low power indication ensure it's always ready when needed. The integrated Collapsible Backup Rear Sight (CBRS™) provides an instant secondary aiming solution at the press of a button. With a distortion-free aspherical lens, a large viewing window, and 10 brightness settings including night vision compatibility, the XE AMRS delivers clear, consistent performance in any environment — all within a compact, CNC-machined 7075-T6 aluminum housing built for reliable tactical use.

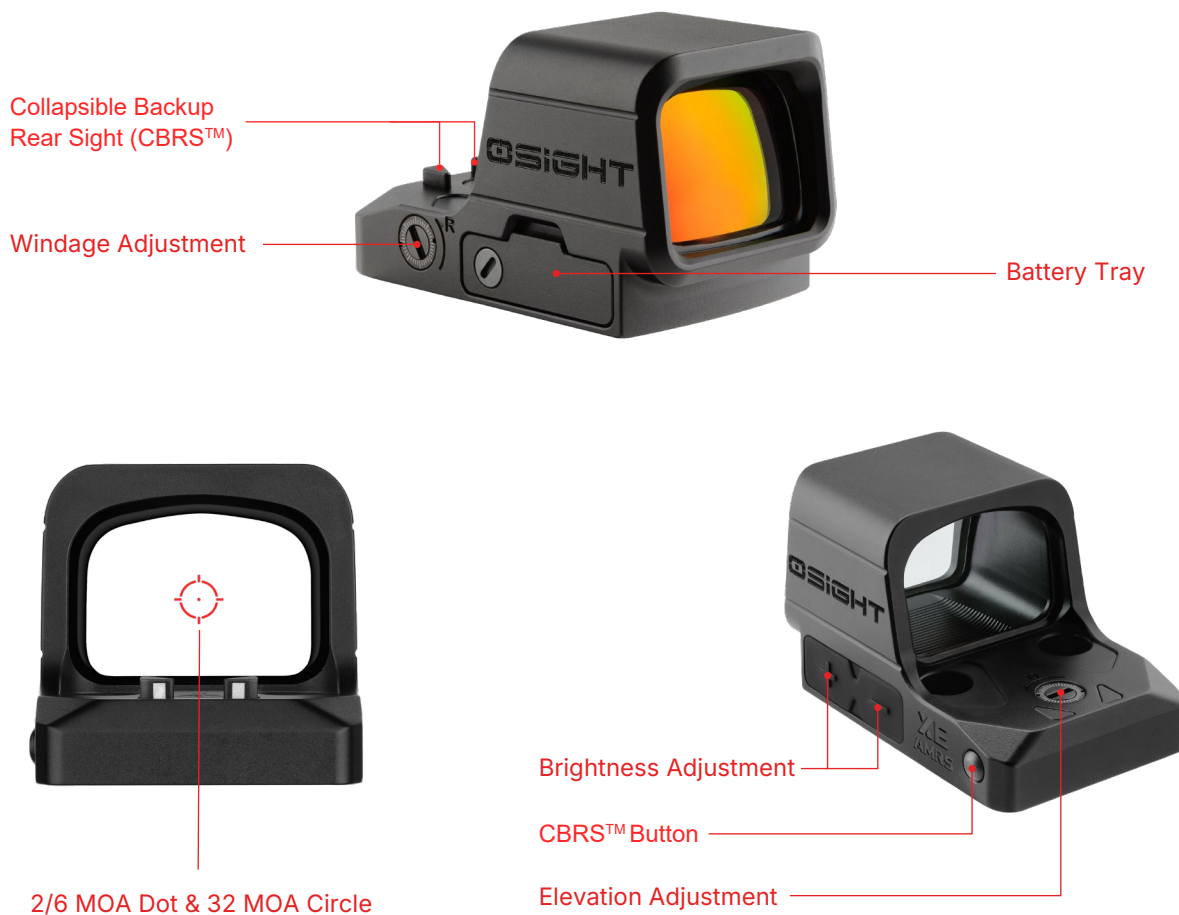

FEATURES

- **Enclosed Emitter Optic with RMR Footprint:** An enclosed emitter optic built on the industry-standard Ruggedized Miniature Reflex footprint, the Osight XE AMRS offers rugged environmental protection and broad seamless full-size and compact pistol compatibility.
- **Industry’s First 2/6+32 MOA Advanced Multi-Reticle System (AMRS):** Switching between a 2 MOA dot, 2 MOA dot + 32 MOA circle, 6 MOA dot, 6 MOA dot + 32 MOA circle, and 32 MOA circle — you can tailor your aiming solution to any shooting scenario.
- **Industry’s First Collapsible Backup Rear Sight (CBRS™):** The integrated, collapsible rear sight serves as a reliable alternative in case the optic is powered off. With a quick press of the pop-up button, you can have a backup sighting system that ensures you can maintain your accuracy and continue shooting effectively.
- **Side-Loading CR1632 Battery:** Effortless battery replacement without removing the optic ensures hassle-free re-zeroing. A high-end CR1632 battery offers easy accessibility while maintaining steady performance.
- **Aspherical Lens:** The aspherical lens ensures zero distortion, parallax-free performance, and exceptional clarity for rapid, precise target acquisition.
- **Compact Size:** Compact build, engineered to deliver duty-level capability with exceptional carry comfort.
- **Motion Sensor Function:** The Osight XE AMRS powers on at the slightest movement, and powers down after 3 minutes of inactivity to conserve battery.
- **Low Power Indication:** If battery voltage drops below 2.2V, the reticle will quickly triple-flash once per minute to recommend a battery replacement.
- **CNC-Machined Aircraft-Grade 7075-T6 Aluminum:** The optic is nearly indestructible with CNC-machined aircraft-grade 7075-T6 aluminum housing, ensuring durability and a professional edge over time.
- **Large Field of View:** Engineered with advanced anti-reflective lens coatings, this sight maximizes light transmission for unmatched clarity, allowing you to quickly lock onto targets with pinpoint precision. A 0.91" × 0.71" window delivers a greater sight picture, ensuring faster target acquisition and quicker follow-up shots.
- **10 Brightness Settings:** 8 daylight and 2 night vision settings — compatible levels for versatility in any demands.
- **Memory Function:** Once activated, the built-in memory function returns to the last selected brightness level, allowing users to focus on the target without distraction.

RUNTIME & BRIGHTNESS

Reticle	2 MOA Dot	2 + 32 MOA	6 MOA Dot	6 + 32 MOA	32 MOA Circle
					
Mode 3	105,000 H	63,000 H	100,000 H	61,000 H	66,000 H

Settings	Night Vision	Day Light
Brightness	(Lowest) Level 1-2	Level 3-10 (Brightest)

OSIGHT XE AMRS

One Optic. Absolute Adaptability

SPECIFICATIONS

Optic	Osight XE AMRS
Reticle Type	2/6 MOA Dot & 32 MOA Circle
Reticle Color	Red
Emitter	Enclosed
Light Wavelength	660 nm
Adjustment Per Click	1 MOA
W&E Travel Range	± 45 MOA
Battery Life	105,000 H (Mode 3, 2 MOA Dot-only)
Power Source	CR1632
Brightness Settings	8 DL & 2 NV
Window Size	0.91 × 0.71 in / 23 × 18 mm
Magnification	1×
Aspherical Lens	Yes
Parallax Free	Yes
Unlimited Eye Relief	Yes
Motion Sensor Function	Yes
Memory Function	Yes
Multi-Coatings	Yes
Housing Material	CNC-Machined Aircraft-Grade 7075-T6 Aluminum
Waterproof Rating	IPX7
Dimensions	1.91 × 1.20 × 1.16 in 48.5 × 30.5 × 29.5 mm
Weight	1.80 oz / 51 g

⚠ WARNING

- **INGESTION HAZARD:** This product contains a button cell or coin battery.
- **DEATH** or serious injury can occur if ingested.
- A swallowed button cell or coin battery can cause **Internal Chemical Burns** in as little as **2 hours**.
- **KEEP** new and used batteries **OUT OF REACH** of **CHILDREN**.
- **Seek immediate medical attention** if a battery is suspected to be swallowed or inserted inside any part of the body.



WARRANTY



www.osight.com/lifetime-warranty

OPTIONAL ACCESSORY

Picatinny Rail Mounted Adapter (OSP-091)

Picatinny Rail Mounted Adapter (OSP-157)

IN THE BOX

Optic (CR1632 battery included)

Adjustment Tool

READ ME card

3 × M3*8 mm Screws

3 × M3*10 mm Screws

3 × #4-40*0.295 in Screws

3 × #4-40*0.374 in Screws

3 × #6-32*0.315 in Screws

3 × #6-32*0.394 in Screws

3 × #6-40*0.315 in Screws

3 × #6-40*0.394 in Screws

2 × Spare Battery Compartment Screws

Osight XE AMRS Dust Cover

Screw Box

Osight Sticker

Cleaning Cloth

Safety Warnings

User Manual



Note: The Osight XE AMRS MUST be mounted properly by applying non-permanent (medium/blue) threadlocker to the included screws. AND torque each screw to 15-17 in-lbs (suggested torque value in the READ ME card). If an adapter plate is required, please follow the manufacturer's installation instructions.

WATERPROOF
IPX7



COMPLIANCE
CAN ICES-003 (B) / NMB-003 (B)



www.osight.com